


Self-contained non-maintained emergency light for indoor use (2 adjustable heads)

Self-contained non-maintained emergency light for indoor use (2 adjustable heads) provides customizable illumination coverage during power outages. This classic surface-mounted fixture is suitable for ceiling or wall installation, suitable for indoor use only. It automatically switches to emergency mode upon detecting a main power failure.



- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20

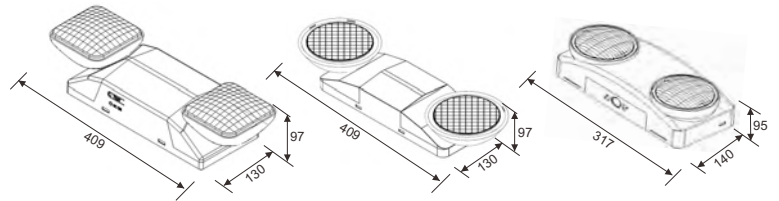

Main parts and material

Enclosure	Fire retardant ABS (UL 94 V-0 rated)	Lamp	2 x 360° adjustable heads, LED array, cool white
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction boxes)	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminous flux	Dimension W x H x D (mm)	Ref. No.
Self-contained non-maintained, square 2 heads, white base	120/277 VAC, 50/60 Hz, consumption 6 W	lead-acid, 6 V, 4.5 Ah	3 hours	220 lm	409 x 130 x 97	CL0801 (UL)
Self-contained non-maintained, square 2 heads, black base	120/277 VAC, 50/60 Hz, consumption 6 W	lead-acid, 6 V, 4.5 Ah	3 hours	220 lm	409 x 130 x 97	CL0802 (UL)
Self-contained non-maintained, round 2 heads, white base	120/277 VAC, 50/60 Hz, consumption 6 W	lead-acid, 6 V, 4.5 Ah	3 hours	220 lm	409 x 130 x 97	CL0803 (UL)
Self-contained non-maintained, round 2 heads, black base	120/277 VAC, 50/60 Hz, consumption 6 W	lead-acid, 6 V, 4.5 Ah	3 hours	220 lm	409 x 130 x 97	CL0804 (UL)

CL08 /

Self-contained non-maintained emergency light for indoor use (2 adjustable heads)

Available size

Type	Main power	Backup power	Duration	Luminous flux	Dimension W x H x D (mm)	Ref. No.
Self-contained non-maintained, round 2 heads, white base, compact	120/277 VAC, 50/60 Hz, consumption 8 W	lead-acid, 6 V, 4.5 Ah	3 hours	250 lm	317 x 140 x 95	CL0805 (UL)
Self-contained non-maintained, round 2 heads, black base, compact	120/277 VAC, 50/60 Hz, consumption 8 W	lead-acid, 6 V, 4.5 Ah	3 hours	250 lm	317 x 140 x 95	CL0806 (UL)