



Self-contained maintained text-based exit sign (Metal enclosure)

Self-contained maintained text-based exit sign (Metal enclosure) is a continuously illuminated evacuation device installed above exit doors and along egress paths. It provides clear guidance to emergency exit, ensuring high visibility and reliable direction for occupant in low-light or smoke-obscured environments.

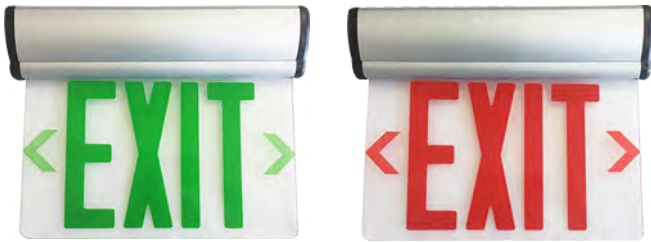

- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20

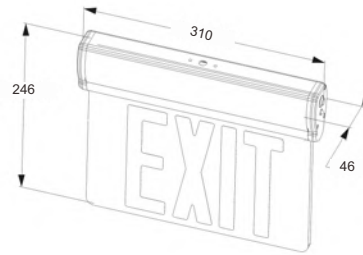

Main parts and material

Enclosure	Aluminum alloy, translucent acrylic panel	Light source	LED array, up to 100 ft viewing distance
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction box), removable directional arrow sticker	Others	Self-test & diagnostics, manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Single face, lettering EXIT + arrow, green	120/277 VAC, 50/60 Hz, consumption 3 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	310 x 246 x 46	CL2101 (UL)
Single face, lettering EXIT + arrow, red	120/277 VAC, 50/60 Hz, consumption 3 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	310 x 246 x 46	CL2102 (UL)
Double face, lettering EXIT + arrow, green	120/277 VAC, 50/60 Hz, consumption 3 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	310 x 246 x 46	CL2103 (UL)
Double face, lettering EXIT + arrow, red	120/277 VAC, 50/60 Hz, consumption 3 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	310 x 246 x 46	CL2104 (UL)