



Self-contained maintained text-based exit sign (Plastic enclosure & bilingual)

Self-contained maintained text-based exit sign (Plastic enclosure & bilingual) is a continuously illuminated evacuation device installed above exit doors and along egress paths. It provides clear guidance to emergency exit, ensuring high visibility and reliable direction for occupant in low-light or smoke-obscured environments.

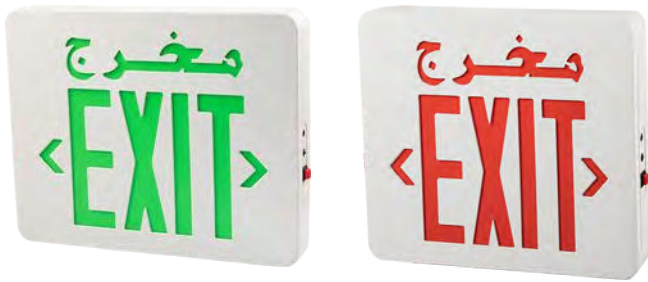

- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20



Main parts and material

Enclosure	Fire retardant ABS (UL 94 V-0 rated)	Light source	LED array, up to 100 ft viewing distance
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction box), removable directional arrow sticker	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Single face, lettering مخرج EXIT + arrow, green	100 ~ 240 VAC, 50/60 Hz, consumption 2.5 W	Ni-MH, 4.8 V, 600 mAh	3 hours	> 8 cd/m ²	308 x 220 x 43	CL2401(UL)
Single face, lettering مخرج EXIT + arrow, red	100 ~ 240 VAC, 50/60 Hz, consumption 2.5 W	Ni-MH, 4.8 V, 600 mAh	3 hours	> 8 cd/m ²	308 x 220 x 43	CL2402 (UL)
Double face, lettering مخرج EXIT + arrow, green	100 ~ 240 VAC, 50/60 Hz, consumption 2.5 W	Ni-MH, 4.8 V, 600 mAh	3 hours	> 8 cd/m ²	308 x 220 x 43	CL2403 (UL)
Double face, lettering مخرج EXIT + arrow, red	100 ~ 240 VAC, 50/60 Hz, consumption 2.5 W	Ni-MH, 4.8 V, 600 mAh	3 hours	> 8 cd/m ²	308 x 220 x 43	CL2404 (UL)

CL24 /