


Self-contained maintained running man exit sign (Plastic enclosure)

Self-contained maintained running man exit sign (Plastic enclosure) is a continuously illuminated evacuation device installed above exit doors and along egress paths. It provides clear guidance to emergency exit, ensuring high visibility and reliable direction for occupant in low-light or smoke-obscured environments.



- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20

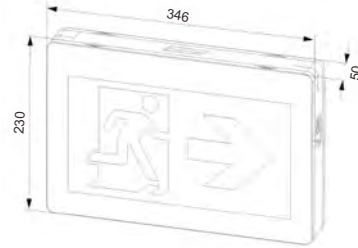

Main parts and material

Enclosure	Fire retardant ABS (UL 94 V-0 rated)	Light source	LED array, up to 100 ft viewing distance
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction box)	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Single face, running man	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2601 (UL)
Single face, running man + arrow to right	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2602 (UL)
Single face, running man + arrow to left	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2603 (UL)
Single face, running man + arrow to down	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2604 (UL)

Self-contained maintained running man exit sign (Plastic enclosure)

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Double face, running man	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2605 (UL)
Double face, running man + arrow to right	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2606 (UL)
Double face, running man + arrow to left	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2607 (UL)
Double face, running man + arrow to down	120/277 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 500 mAh	3 hours	> 8 cd/m ²	346 x 230 x 50	CL2608 (UL)