



Self-contained maintained text-based exit sign and top emergency light combo

Self-contained maintained text-based exit sign and top emergency light combo combines exit sign and emergency light in a single fixture. The exit sign remains continuously illuminated to mark escape routes, while the emergency light provides customizable illumination and automatically activates during a power failure.

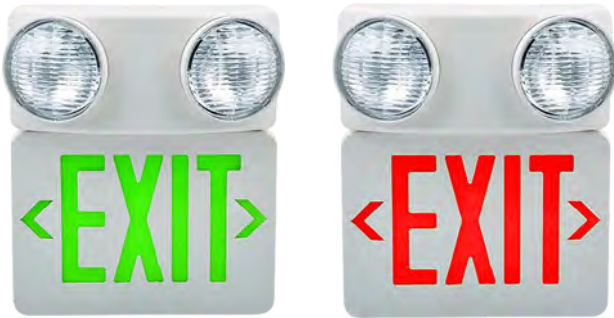

- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20



Main parts and material

Enclosure	Fire retardant ABS (UL 94 V-0 rated)	Light source	Main body: LED array panel Head: 2 x 360° adjustable
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction box), removable directional arrow sticker	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Single face, lettering EXIT + arrow, green, round head	120/277 VAC, 50/60 Hz, consumption 7.5 W	lead-acid, 6 V, 4.5 Ah	3 hours	> 8 cd/m ²	317 x 362 x 95	CL3601 (UL)
Single face, lettering EXIT + arrow, red, round head	120/277 VAC, 50/60 Hz, consumption 7.5 W	lead-acid, 6 V, 4.5 Ah	3 hours	> 8 cd/m ²	317 x 362 x 95	CL3602 (UL)
Double face, lettering EXIT + arrow, green, round head	120/277 VAC, 50/60 Hz, consumption 7.5 W	lead-acid, 6 V, 4.5 Ah	3 hours	> 8 cd/m ²	317 x 362 x 95	CL3603 (UL)
Double face, lettering EXIT + arrow, red, round head	120/277 VAC, 50/60 Hz, consumption 7.5 W	lead-acid, 6 V, 4.5 Ah	3 hours	> 8 cd/m ²	317 x 362 x 95	CL3604 (UL)