

Self-contained maintained running man exit sign and side emergency light combo


Self-contained maintained running man exit sign and side emergency light combo combines exit sign and emergency light in a single fixture. The exit sign remains continuously illuminated to mark escape routes, while the emergency light provides customizable illumination and automatically activates during a power failure.



- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors only, IP20



Optional pictogram

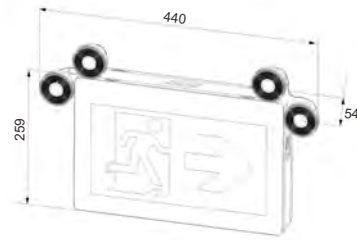

Main parts and material

Enclosure	Fire retardant ABS (UL 94 V-0 rated)	Light source	Main body: LED array panel Head: 2 x 360° adjustable
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction box)	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Single face, running man, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3801 (UL)
Single face, running man + arrow to right, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3802 (UL)
Single face, running man + arrow to left, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3803 (UL)
Single face, running man + arrow to down, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3804 (UL)

Self-contained maintained running man exit sign and side emergency light combo

Available size

Type	Main power	Backup power	Duration	Luminance	Dimension W x H x D (mm)	Ref. No.
Double face, running man, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3805 (UL)
Double face, running man + arrow to right, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3806 (UL)
Double face, running man + arrow to left, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3807 (UL)
Double face, running man + arrow to down, round head	120/347 VAC, 50/60 Hz, consumption 4 W	Ni-Cd, 4.8 V, 1000 mAh	1.5 hours	> 8 cd/m ²	440 x 259 x 54	CL3808 (UL)