

## Self-contained waterproof maintained bulkhead emergency luminaire


Self-contained waterproof maintained bulkhead emergency luminaire ensures continuous illumination regardless of the mains power supply status. This classic surface-mounted fixture is suitable for ceiling or wall installation, both indoors and outdoors. It automatically switches to emergency mode upon detecting a main power failure.



- Certificate: CE
- Standard: EN IEC 60598-2-22
- Feature: Self-contained, maintained
- Temperature: -10°C to 50°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors and outdoors, IP65



Optional pictogram

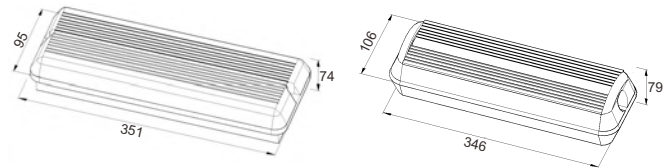

### Main parts and material

<b>Enclosure</b>	Fire retardant ABS base, optically clear PC diffuser	<b>Lamp</b>	LED, 20 x SMD 5050, cool white
<b>Backup power</b>	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	<b>Networking</b>	/
<b>Accessories</b>	Universal mounting bracket (fits standard junction boxes), adhesive directional label	<b>Others</b>	Manual test button, status indicator

### Available size

Type	Main power	Backup power	Duration	Luminous flux	Dimension W x H x D (mm)	Ref. No.
Self-contained waterproof maintained bulkhead	220 ~ 240 VAC, 50/60 Hz, consumption 8 W	Ni-Cd, 3.6 V, 2.5 Ah	3 hours	145 lm	351 x 95 x 74	CL7301 (CE)
Self-contained waterproof maintained bulkhead	220 ~ 240 VAC, 50/60 Hz, consumption 8 W	Ni-Cd, 3.6 V, 2.5 Ah	3 hours	200 lm	346 x 106 x 79	CL7302 (CE)