


Right-angle type wet landing valve

Right-angle type wet landing valve from TPMC is designed with a 90-degree outlet to suit vertical piping layouts and reduce pressure losses. This design provides convenient hose attachment and ensures stable discharge for prompt water supply in high-rise wet riser systems.



- Certificate: BSI / LPCB Approved
- Standard: BS 5041-1, BS 5154 globe type
- Connection: Flanged to EN 1092-3, or screwed to ISO 7-1
- Temperature: 0°C to 38°C
- Test: Body 22.5 bar / seat 16.5 bar
- Surface: Red powder coating (RAL 3000)

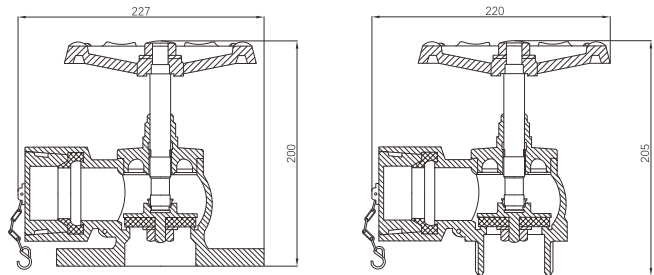

Main parts and material

DN 65 size

Body / bonnet / disk	Copper alloy, LG2 or CZ122	Handwheel	Grey cast iron to BS 1452
Blank cap	Copper alloy to EN 1982, with chain	Strap	Artificial leather, with non-ferrous padlock

Available size

Size	Type	Inlet	Outlet	Working pressure (bar)	Ref. No.
DN 50	Right-angle	Flanged DN 50, PN 16	2.5" BS336	15	FE1201
DN 65	Right-angle	Flanged DN 65, PN 16	2.5" BS336	15	FE1202
DN 65	Right-angle	2.5" BSPT, M	2.5" BS336	15	FE1203

Note: LPCB certified (Cert No. 1153Le) in TPMC models F25-50, F25-65, F26-65T.