


Rubber lined split pipe clamp (Rubber lined split ring hanger)

Rubber lined split pipe clamp (Rubber lined split ring hanger) from TPMC is a two-piece ring designed for the suspension of light duty, non-insulated stationary piping. It features a rubber lining that provides cushioning between the clamp and the pipe to prevent surface damage and reduce noise and vibration transmission. An integrated top nut accepts a threaded hanger rod, allowing installation close to ceilings for horizontal runs or close to walls for vertical runs. UL Listed and FM Approved, this clamp is ideal for light duty applications in fire protection, HVAC, and mechanical systems requiring vibration isolation or surface protection.



- Certificate: UL Listed / FM Approved
- Standard: UL 203, MSS SP-58 (Type 12), MSS SP-69
- Material: Carbon steel with EPDM rubber lining
- Temperature: -20°C to 110°C
- Surface: Pre-galvanized / electro-galvanized
- Application: Support non-insulated carbon steel and CPVC piping

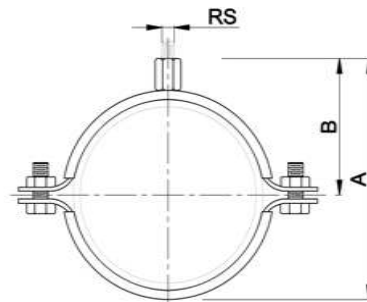

Available sizes

Pipe size		Rod size (RS)		Dimension (mm)		Max rec. load (lbs)	Ref. No.
NPS	DN	Imperial	Metric	A	B		
1/2"	15	3/8" & 5/16"	M10 & M8*	51	34	300	P5501 (UL)
3/4"	20	3/8" & 5/16"	M10 & M8*	56	36	300	P5502 (UL/FM)
1"	25	3/8" & 5/16"	M10 & M8*	63	40	300	P5503 (UL/FM)
1-1/4"	32	3/8" & 5/16"	M10 & M8*	71	44	300	P5504 (UL/FM)
1-1/2"	40	3/8" & 5/16"	M10 & M8*	78	47	300	P5505 (UL/FM)
2"	50	1/2" & 3/8"	M12 & M10*	96	59	300	P5506 (UL/FM)
2-1/2"	65	1/2" & 3/8"	M12 & M10*	111	67	340	P5507 (UL/FM)
3"	80	1/2" & 3/8"	M12 & M10*	124	73	420	P5508 (UL/FM)
4"	100	1/2" & 3/8"	M12 & M10*	155	89	600	P5509 (UL/FM)
5"	125	1/2" & 3/8"	M12 & M10*	183	100	800	P5510 (UL/FM)

Rubber lined split pipe clamp (Rubber lined split ring hanger)

Available sizes

Pipe size		Rod size (RS)		Dimension (mm)		Max rec. load (lbs)	Ref. No.
NPS	DN	Imperial	Metric	A	B		
6"	150	1/2" & 3/8"	M12 & M10*	210	116	1060	P5511 (UL/FM)
8"	200	5/8"	M16	270	147	1620	P5512 (UL/FM)
10"	250	5/8"	M16	327	175	2340	P5513 (UL/FM)
12"	300	5/8"	M16	377	201	3160	P5514 (UL/FM)

Note:

1. Load ratings are calculated with a minimum safety factor of 5:1 and apply at normal ambient temperatures. Values are based on the lesser of hanger rod tensile strength and pipe clamp capacity. For critical applications, consult project engineering specifications.
2. Supplied as a complete set, including the clamp and 2 sets of bolts and nuts.
3. *For sizes 1/2" to 6", each clamp accommodates two different rod sizes. The asterisk (*) in the "Rod size" column indicates that the clamp can be used with either of the two listed rod sizes (e.g., for 1/2" clamp, both 3/8" and 5/16" rods fit).