


Standard pipe strap (Pipe clip)

Standard pipe strap (Pipe clip) from TPMC is a rigid, one-piece attachment designed to secure stationary piping directly to the flat face of a horizontal or vertical structural member. The U-shaped strap wraps over the pipe, while the pipe rests nearly flush against the mounting surface, with two-hole design allowing secure bolting on both sides.

UL Listed and FM Approved, it is ideal for supporting pipe runs from ceilings, walls, or strut channel in fire protection and mechanical piping systems where vertical adjustment or significant thermal movement is not required.



- Certificate: UL Listed / FM Approved
- Standard: UL 203, MSS SP-58 (Type 26), MSS SP-69
- Material: Carbon steel
- Temperature: Max 343°C
- Surface: Electro-galvanized
- Application: Attach pipe to the face of a horizontal or vertical structural member

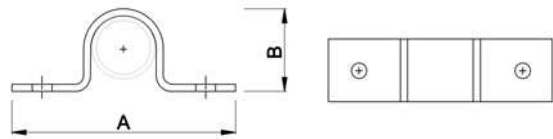

Available sizes

Pipe size		Dimension (mm)		Bolting size	Max rec. load (lbs)	Ref. No.
NPS	DN	A	B			
1/2"	15	72	24	1/4" x 2	300	P5601 (UL)
3/4"	20	76	30	1/4" x 2	300	P5602 (UL/FM)
1"	25	90	36	1/4" x 2	300	P5603 (UL/FM)
1-1/4"	32	95	45	1/4" x 2	300	P5604 (UL/FM)
1-1/2"	40	103	51	1/4" x 2	300	P5605 (UL/FM)
2"	50	144	66	3/8" x 2	300	P5606 (UL/FM)
2-1/2"	65	156	79	3/8" x 2	340	P5607 (UL/FM)
3"	80	172	94	3/8" x 2	420	P5608 (UL/FM)
4"	100	198	120	1/2" x 2	600	P5609 (UL/FM)
5"	125	225	147	1/2" x 2	800	P5610 (UL/FM)
6"	150	152	174	1/2" x 2	1060	P5611 (UL/FM)
8"	200	304	225	1/2" x 2	1620	P5612 (UL/FM)
10"	250	369	280	1/2" x 2	2340	P5613 (UL/FM)
12"	300	420	331	1/2" x 2	3160	P5614 (UL/FM)

Note: Load ratings are calculated with a minimum safety factor of 5:1 and apply at normal ambient temperatures.