



Flanged Y type strainer

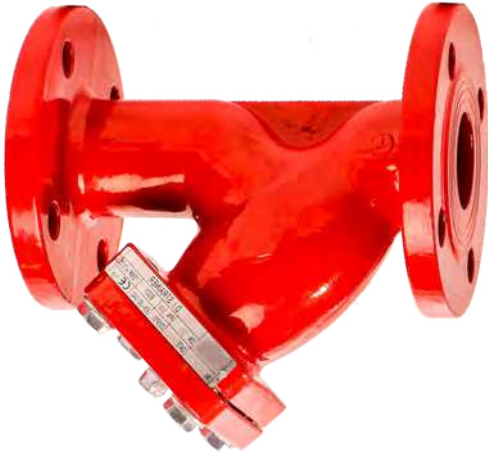

- Certificate: UL Listed
- Standard: UL Subject 321
- Connection: Flanged as EN 1092-2
- Temperature: 0°C to 80°C
- W. pressure: PN 16
- Surface: FBE coating as AWWA C550

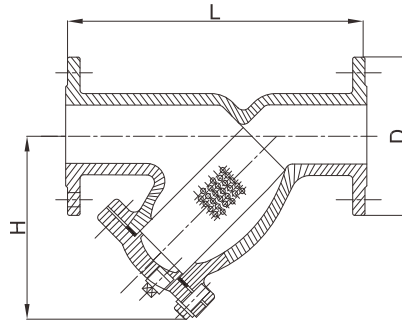

Main parts and material

Body / cover	Ductile iron as EN 1563, EN-GJS-450-10	Screen	SS304, SS316, or Monel, with 1.5 to 2.0 mm hole, as 7 ~ 11 mesh
Cover gasket	EPDM	Plug	Malleable iron

Available size

Size			Dimension (mm)		Hole size / mesh number	Working pressure	Ref. No.
Inch	DN	mm	L	H			
2"	50	60.3	230	140	1.5mm / 11	PN 16	V2601 (UL)
2-1/2"	65	76.1	290	175	1.5mm / 11	PN 16	V2602 (UL)
3"	80	88.9	310	198	1.5mm / 11	PN 16	V2603 (UL)
4"	100	114.3	350	229	1.5mm / 11	PN 16	V2604 (UL)
5"	125	139.7	400	287	1.5mm / 11	PN 16	V2605 (UL)
6"	150	165.1	480	304	1.5mm / 11	PN 16	V2606 (UL)
8"	200	219.1	600	371	2.0mm / 7	PN 16	V2607 (UL)
10"	250	273.0	730	469	2.0mm / 7	PN 16	V2608 (UL)
12"	300	323.9	850	540	2.0mm / 7	PN 16	V2609 (UL)
18"	450	457	1200	862	2.0mm / 8	PN 16	V2610 (ISO)
20"	500	508	1250	926	2.0mm / 8	PN 16	V2611 (ISO)
24"	600	610	1450	1057	2.0mm / 8	PN 16	V2612 (ISO)

Note: When Monel material for screen is selected, the strainer is ISO certified, not UL listed.