


Threaded flush bushing



- Certificate: ISO
- Standard: Refer to ASME B16.11
- Material: Forged carbon steel ASTM A105
Forged SS ASTM A182, F304 / F316L
- Thread: NPT / BSPT
- W. pressure: ≤ Class 6000
- Surface: Oiled / hot dip galvanized
Pickling white, etc.

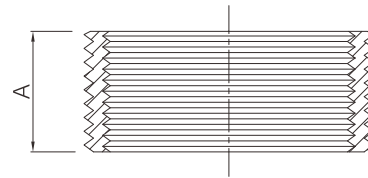

Available size

Size			Min length	Ref. No.
NPS	DN	OD (mm)	A (mm)	
1/2" x 3/8"	15 x 10	21.3 x 17.1	14	N5801
3/4" x 1/2"	20 x 15	26.7 x 21.3	16	N5802
1" x 1/2"	25 x 15	33.4 x 21.3	19	N5803
1" x 3/4"	25 x 20	33.4 x 26.7	19	N5804
1-1/4" x 1/2"	32 x 15	42.2 x 21.3	21	N5805
1-1/4" x 3/4"	32 x 20	42.2 x 26.7	21	N5806
1-1/4" x 1"	32 x 25	42.2 x 33.4	21	N5807
1-1/2" x 1/2"	40 x 15	48.3 x 21.3	21	N5808
1-1/2" x 3/4"	40 x 20	48.3 x 26.7	21	N5809
1-1/2" x 1"	40 x 25	48.3 x 33.4	21	N5810
1-1/2" x 1-1/4"	40 x 32	48.3 x 42.2	21	N5811
2" x 1/2"	50 x 15	60.3 x 21.3	22	N5812
2" x 3/4"	50 x 20	60.3 x 26.7	22	N5813
2" x 1"	50 x 25	60.3 x 33.4	22	N5814
2" x 1-1/4"	50 x 32	60.3 x 42.2	22	N5815
2" x 1-1/2"	50 x 40	60.3 x 48.3	22	N5816

Threaded flush bushing

Available size

Size			Min length	Ref. No.
NPS	DN	OD (mm)	A (mm)	
2-1/2" x 1/2"	65 x 15	73.0 x 21.3	27	N5817
2-1/2" x 3/4"	65 x 20	73.0 x 26.7	27	N5818
2-1/2" x 1"	65 x 25	73.0 x 33.4	27	N5819
2-1/2" x 1-1/4"	65 x 32	73.0 x 42.2	27	N5820
2-1/2" x 1-1/2"	65 x 40	73.0 x 48.3	27	N5821
2-1/2" x 2"	65 x 50	73.0 x 60.3	27	N5822
3" x 1/2"	80 x 15	88.9 x 21.3	28	N5823
3" x 3/4"	80 x 20	88.9 x 26.7	28	N5824
3" x 1"	80 x 25	88.9 x 33.4	28	N5825
3" x 1-1/4"	80 x 32	88.9 x 42.2	28	N5826
3" x 1-1/2"	80 x 40	88.9 x 48.3	28	N5827
3" x 2"	80 x 50	88.9 x 60.3	28	N5828
3" x 2-1/2"	80 x 65	88.9 x 73.0	28	N5829
4" x 1/2"	100 x 15	114.3 x 21.3	32	N5830
4" x 3/4"	100 x 20	114.3 x 26.7	32	N5831
4" x 1"	100 x 25	114.3 x 33.4	32	N5832
4" x 1-1/4"	100 x 32	114.3 x 42.2	32	N5833
4" x 1-1/2"	100 x 40	114.3 x 48.3	32	N5834
4" x 2"	100 x 50	114.3 x 60.3	32	N5835
4" x 2-1/2"	100 x 65	114.3 x 73.0	32	N5836
4" x 3"	100 x 80	114.3 x 88.9	32	N5837

Note: Bushings are not identified by class designation, and they may be used for ratings up to Class 6000 designation