



## Equal half socket (Medium and heavy type)

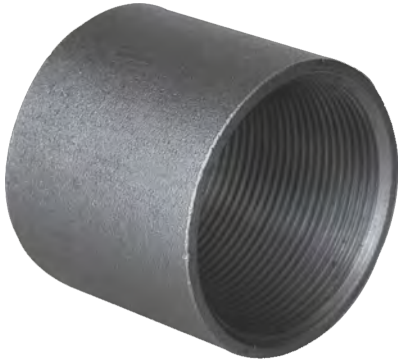

- Certificate: ISO
- Standard: EN 10241
- Material: As medium or heavy series tube
- Thread: BSPP / BSPT / NPT
- Hydro test: Min 50 bar
- Surface: Oiled / hot dip galvanized



### Available size for medium series

| Size   |     |               | Thickness type | Min OD | Overall length | Ref. No. |
|--------|-----|---------------|----------------|--------|----------------|----------|
| NPS    | DN  | OD (mm)       |                | D (mm) | L (mm)         |          |
| 1/2"   | 15  | 21.3          | Heavy          | 26.6   | 15             | NE2501   |
| 3/4"   | 20  | 26.9          | Heavy          | 31.8   | 17             | NE2502   |
| 1"     | 25  | 33.7          | Heavy          | 39.5   | 20             | NE2503   |
| 1-1/4" | 32  | 42.4          | Heavy          | 48.3   | 22             | NE2504   |
| 1-1/2" | 40  | 48.3          | Heavy          | 54.5   | 22             | NE2505   |
| 2"     | 50  | 60.3          | Heavy          | 68.0   | 26             | NE2506   |
| 2-1/2" | 65  | 76.1          | Heavy          | 84.2   | 30             | NE2507   |
| 3"     | 80  | 88.9          | Heavy          | 98.4   | 34             | NE2508   |
| 4"     | 100 | 114.3         | Heavy          | 124.0  | 40             | NE2509   |
| 5"     | 125 | 139.7         | Heavy          | 149.0  | 44             | NE2510   |
| 6"     | 150 | 165.1 / 168.3 | Heavy          | 177.0  | 44             | NE2511   |

**Note:**

1. The internal thread shall be parallel BSPP as standard, but BSPT and NPT are also available.
2. Other length is available as customer request.

## Equal half socket (Medium and heavy type)

### Available size for heavy series

| Size   |     |               | Thickness type | Min OD | Overall length | Ref. No. |
|--------|-----|---------------|----------------|--------|----------------|----------|
| NPS    | DN  | OD (mm)       |                | D (mm) | L (mm)         |          |
| 1/2"   | 15  | 21.3          | Heavy          | 27.0   | 16             | NE2521   |
| 3/4"   | 20  | 26.9          | Heavy          | 32.5   | 19             | NE2522   |
| 1"     | 25  | 33.7          | Heavy          | 39.5   | 21             | NE2523   |
| 1-1/4" | 32  | 42.4          | Heavy          | 49.0   | 25             | NE2524   |
| 1-1/2" | 40  | 48.3          | Heavy          | 56.0   | 25             | NE2525   |
| 2"     | 50  | 60.3          | Heavy          | 68.0   | 28             | NE2526   |
| 2-1/2" | 65  | 76.1          | Heavy          | 84.0   | 30             | NE2527   |
| 3"     | 80  | 88.9          | Heavy          | 98.0   | 35             | NE2528   |
| 4"     | 100 | 114.3         | Heavy          | 124.0  | 40             | NE2529   |
| 5"     | 125 | 139.7         | Heavy          | 151.0  | 44             | NE2530   |
| 6"     | 150 | 165.1 / 168.3 | Heavy          | 177.0  | 44             | NE2531   |

**Note:**

1. The internal thread shall be parallel BSPP as standard, but BSPT and NPT are also available.
2. Other length is available as customer request.