
Fire pump waste cone

Fire pump waste cone provides quick-and-easy visual confirmation of proper water flow. Two sight glasses extending from the center allow users to observe the flow and ensure that fire pump pressure relief valve is working correctly.



- Certificate: ISO
- Standard: NFPA 20
- Connection: Flanged as ANSI 16.42 Class 150 / 300, FF or RF
- Surface: FBE coating as AWWA C550

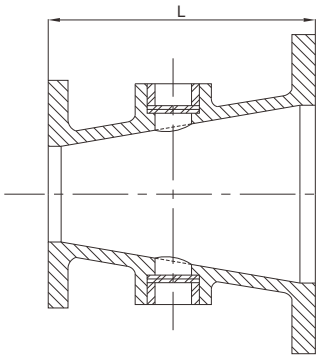

Main parts and material

Body	Ductile iron as ASTM A536, 65-45-12	**Sight glass**	2 x 2" SS 304 / 316, close type
Body casting	Single body, no welding	/	/

Available size (Source 1 with ISO)

Connection size		Length (mm)	Connection	Ref. No.
Inch	DN			
2" x 2-1/2"	50 x 65	210	Class 150	U3601
3" x 5"	80 x 125	210	Class 150	U3602
3" x 6"	80 x 150	229	Class 150	U3603
4" x 6"	100 x 150	229	Class 150	U3604
4" x 8"	100 x 200	260	Class 150	U3605
6" x 8"	150 x 200	260	Class 150	U3606
6" x 10"	150 x 250	292	Class 150	U3607
8" x 12"	200 x 300	330	Class 150	U3608
8" x 14"	200 x 350	356	Class 150	U3609
10" x 12"	250 x 300	330	Class 150	U3610
10" x 16"	250 x 400	406	Class 150	U3611

Fire pump waste cone

Available size (Source 2 with ISO)

Connection size		Length (inch)	Connection	Ref. No.
Inch	DN			
3" x 5"	80 x 125	8.25" / 9.24"	Class 150 / 300	U3621
3" x 6"	80 x 150	9.00" / 9.69"	Class 150 / 300	U3622
4" x 6"	100 x 150	9.00" / 9.75"	Class 150 / 300	U3623
4" x 8"	100 x 200	10.25" / 11.06"	Class 150 / 300	U3624
6" x 8"	150 x 200	10.25" / 11.19"	Class 150 / 300	U3625
6" x 10"	150 x 250	11.50" / 12.63"	Class 150 / 300	U3626
8" x 12"	200 x 300	13.00" / 14.25"	Class 150 / 300	U3627
8" x 14"	200 x 350	14.00" / 15.25"	Class 150 / 300	U3628