
Flanged eccentric reducer

Flanged eccentric reducer is designed to connect outlet of fire pump and inlet of subsequent pipeline, so reduce the friction loss by reducing velocity of medium in the pipeline. It can be installed top-flat or bottom-flat.



- Certificate: ISO
- Standard: Refer to NFPA 20
- Connection: Flanged as ANSI B16.5 Class 150 / 300, EN 1092-1 PN16 / PN25, etc.
- Material: Carbon steel / SS304
- W. pressure: 300 psi
- Surface: Red / blue painting

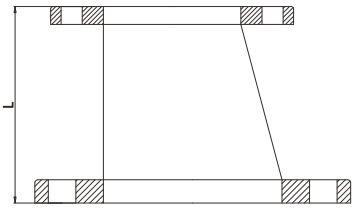

Available size

Size		L (mm)	Connection	Working pressure (psi)	Ref. No.
Inch	DN				
2" x 2-1/2"	50 x 65	110	Class 150 / PN16	300	U5201
2" x 3"	50 x 80	110	Class 150 / PN16	300	U5202
2" x 4"	50 x 100	120	Class 150 / PN16	300	U5203
2" x 5"	50 x 125	145	Class 150 / PN16	300	U5204
2" x 6"	50 x 100	160	Class 150 / PN16	300	U5205
2" x 8"	50 x 200	170	Class 150 / PN16	300	U5206
2-1/2" x 3"	65 x 80	110	Class 150 / PN16	300	U5207
2-1/2" x 4"	65 x 100	120	Class 150 / PN16	300	U5208
2-1/2" x 5"	65 x 125	145	Class 150 / PN16	300	U5209
2-1/2" x 6"	65 x 150	160	Class 150 / PN16	300	U5210
2-1/2" x 8"	65 x 200	170	Class 150 / PN16	300	U5211
3" x 4"	80 x 100	120	Class 150 / PN16	300	U5212
3" x 5"	80 x 125	145	Class 150 / PN16	300	U5213
3" x 6"	80 x 150	160	Class 150 / PN16	300	U5214
3" x 8"	80 x 200	170	Class 150 / PN16	300	U5215
3" x 10"	80 x 250	200	Class 150 / PN16	300	U5216
4" x 5"	100 x 125	145	Class 150 / PN16	300	U5217
4" x 6"	100 x 150	160	Class 150 / PN16	300	U5218

Flanged eccentric reducer

Available size

Size		L (mm)	Connection	Working pressure (psi)	Ref. No.
Inch	DN				
4" x 8"	100 x 200	170	Class 150 / PN16	300	U5219
4" x 10"	100 x 250	200	Class 150 / PN16	300	U5220
5" x 6"	125 x 150	160	Class 150 / PN16	300	U5221
5" x 8"	125 x 200	170	Class 150 / PN16	300	U5222
5" x 10"	125 x 250	200	Class 150 / PN16	300	U5223
6" x 8"	150 x 200	170	Class 150 / PN16	300	U5224
6" x 10"	150 x 250	200	Class 150 / PN16	300	U5225
6" x 12"	150 x 300	220	Class 150 / PN16	300	U5226
8" x 10"	200 x 250	200	Class 150 / PN16	300	U5227
8" x 12"	200 x 300	220	Class 150 / PN16	300	U5228
10" x 12"	250 x 300	220	Class 150 / PN16	300	U5229

Note: For flanged connection, it is available with ANSI B16.5 Class 150 / 300, EN 1092-2 PN10 / PN16 / PN25, etc.