


Fire hose reel cabinet

Fire hose reel cabinet protects fire hose reel from contamination & damage. The cabinet is surface or recess mounted in a wall, with compact design for saving space and easy access for operation.



- Certificate: ISO
- Standard: Refer to BS 5041
- Capacity: Fire hose reel
- Mounting: Wall surface / recessed
- Surface: Red powder coating / bright SS

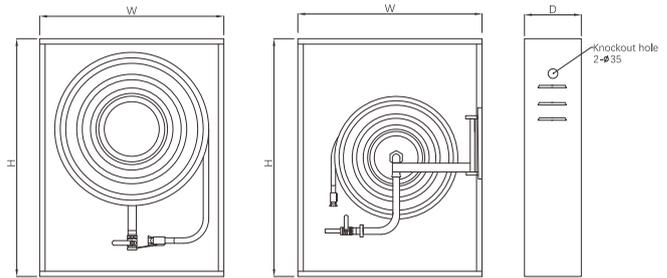

Main parts and material

Box / door	Cold rolled steel or SS, 1.0 / 1.2 / 1.5 mm thickness	Door type	Single door, from left to right open 180°, bullet hinge or continuous piano hinge
Door glazing	Non (full solid), or acrylic viewing panel, slotted inside the door or embedded into the door with rubber raised edge	Lock	Rotary pull lock, or keyed cylinder lock

Available size

Cabinet type	Hose reel type	Capacity	Mounting	Dimension W x H x D (mm)	Ref. No.
Compact	Fixed, manual or auto	19mm x 30m	Surface / recessed	650 x 750 x 245	FE9401
Compact	Fixed, manual or auto	25mm x 30m	Surface / recessed	650 x 750 x 285	FE9402
Compact	Swinging arm, manual or auto	19mm x 30m	Surface / recessed	700 x 700 x 250	FE9403
Compact	Swinging arm, manual or auto	25mm x 30m	Surface / recessed	700 x 700 x 270	FE9404
Compact	Swinging arm, manual	33mm x 30m	Surface / recessed	900 x 900 x 480	FE9405
Compact	Swinging arm, manual or auto	19mm x 45m	Surface / recessed	750 x 750 x 270	FE9406
Compact	Swinging arm, manual or auto	25mm x 45m	Surface / recessed	780 x 780 x 310	FE9407
Compact	Swinging pipe, manual or auto	19mm x 30m	Surface / recessed	720 x 720 x 330	FE9408
Compact	Swinging pipe, manual or auto	25mm x 30m	Surface / recessed	760 x 750 x 330	FE9409
Large	Fixed or Swinging	19mm x 30m / 25mm x 30m	Surface / recessed	800 x 800 x 280	FE9410
Large	Fixed or Swinging	19mm x 30m / 25mm x 30m	Surface / recessed	840 x 840 x 300	FE9411

Note:

1. For recessed type, it contains projection trim on the external face of cabinet with width 38mm.
2. Cabinet can be LPCB & CE approved if it contains LPCB & CE approved fire hose reel.

FE94/